

# Nuvve DC Heavy Duty Charging Station

## V2G | 60KW | DC CCS | HEAVY-DUTY

The Nuvve DC Heavy-Duty Charging Station (RES-HD60-V2G) is designed specifically for vehicle-to-grid (V2G) applications and is the ideal solution for the rapid, smart charging of heavy-duty fleet vehicles such as electric school buses. The RES-HD60-V2G is fully controllable through Nuvve’s fleet management app and our V2G platform (GIVe™) enables unidirectional charging of any vehicle or bidirectional V2G charging and grid-connected building load management services when connected to a V2G-compatible vehicle.

### KEY FEATURES

✓ **CCS1 CONNECTOR (COMBO)**

✓ **UL-1741 SA**

✓ **IEEE 1547**

✓ **95% EFFICIENCY**



#### POWERFUL, RELIABLE CHARGES

The Nuvve DC Heavy-Duty Charging Station (RES-HD60-V2G) features a CCS1 connector that can charge any vehicle with combo connector and discharge V2G-compatible vehicles with Nuvve software integration. It is designed to meet all utility safety standards in North America to enable interconnection of vehicles as a distributed energy resource.



#### YOUR FLEET’S CHARGING ACTIVITY AT A GLANCE

Drivers and fleet managers can remotely monitor and configure the charging of their buses via a fleet management app and trigger instant charging if needed.\*




#### INTELLIGENT GRID SERVICES

Nuvve’s solution is fully scalable to fit your needs and can perform a variety of grid services including frequency regulation, demand response, demand charge management, and time-of-use rate arbitrage, depending on region and interconnection.

*\*Coming soon to the U.S. market*

# Technical Specs RES-HD60-V2G

AC SPECIFICATIONS (POWER)	
Bidirectional Capable	Yes
Rated Power (kW/kVA)	60
Utility Grid Voltage (Vac)	480-3P
Max Rated Utility Current (Aac)	79A @ 480VAC (60 Hz)
Wiring	3 phase WYE (L1, L2, L3, Neutral, Ground)
Utility Grid Frequency (Hz)	60
Power Factor Range	+/- 0.5
THD for Linear Loads	<5%
Charging Efficiency	>95%
Grid Isolation	Galvanic, Integrated
DC OUTPUT	
Maximum Power (kW)	60
Voltage Operating Range (Vdc)	270 to 870
Maximum Current (Adc)	+/- 200A (charging cable limited)
Connector and Cable	CCS1, up to 8m (25 ft)
ENERGY METERING	
AC Energy Meter	+/- 1% from 10% to full scale
MECHANICAL	
PCS Dimensions	31.5"W x 24.5"D x 82"H
PCS Weight	1600 lbs
Dispenser Dimensions	22"W x 17"D x 75"H
Dispenser Weight	150 lbs (configuration dependent)
ENVIRONMENTAL	
Cooling	Air cooled
Environmental Rating	NEMA 3R
Operating Ambient Temp.	-20°C to 45°C (-4 to 113°F)
Storage Temperature Range	-30°C to 60°C (-22 to 140°F)
Humidity	0 to 95% (non-condensing)
Altitude	De-rated over 2,000 m above sea level
COMMUNICATION & CONTROL	
Network Interface	Standard: Ethernet (Optional: WiFi, 3G, 4G, LTE)
CERTIFICATION, SAFETY, COMPLIANCE	
Certifications	UL1741-SA, UL 2202, UL 2231, IEEE 1547.1 & CSA C22.2 No. 107.1-16

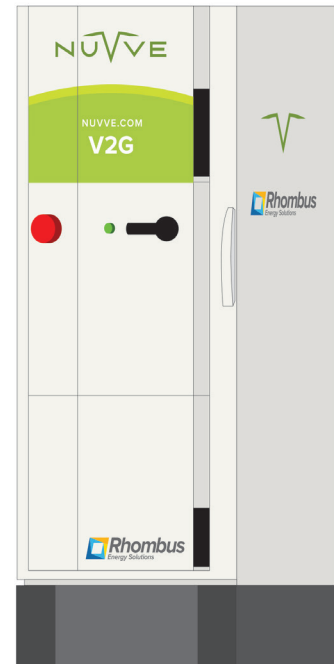

Charging Station



Dispenser

© 2021 Nuve Holding Corp. All rights reserved. Version 4.0.  
All product specifications as of August 2021 and are subject to change. Please contact Nuve for updated information.  
Charging station and dispenser not to scale.