

Nuvve DC Rapid HD Charging Station

V2G | 125kW | DC CCS | HEAVY-DUTY

The Nuvve DC Rapid HD Charging Station (RES-HD125-V2G) is designed specifically for vehicle-to-grid (V2G) applications and is the ideal solution for the rapid, smart charging of heavy-duty fleet vehicles such as electric school buses. The RES-HD125-V2G is fully controllable through Nuvve's fleet management app and our V2G platform (GIVE™) enables unidirectional charging of any vehicle or bidirectional V2G charging and grid-connected building load management services when connected to a V2G-compatible vehicle.

KEY FEATURES

✓ **CCS1 CONNECTOR (COMBO)**

✓ **UL-1741 SA**

✓ **IEEE 1547.1**

✓ **95% EFFICIENCY**



POWERFUL, RELIABLE CHARGES

The Nuvve DC Rapid HD Charging Station (RES-HD125-V2G) features a CCS connector that can charge any vehicle with combo connector and discharge V2G-compatible vehicles with Nuvve software integration. It is designed to meet all utility safety standards in North America to enable interconnection of vehicles as a distributed energy resource.



YOUR FLEET'S CHARGING ACTIVITY AT A GLANCE

Drivers and fleet managers can remotely monitor and configure the charging of their buses via a fleet management app and trigger instant charging if needed.*




INTELLIGENT GRID SERVICES

Nuvve's solution is fully scalable to fit your needs and can perform a variety of grid services including frequency regulation, demand response, demand charge management, and time-of-use rate arbitrage, depending on region and grid interconnection.

Technical Specs RES-HD125-V2G

AC SPECIFICATIONS (POWER)	
Bidirectional Capable	Yes
Rated Power	125 kW/kVA
Utility Grid Voltage	480 Vac-3P
Max Rated Utility Current	+/-160A @ 480VAC (60 Hz)
Wiring	3 phase WYE (L1, L2, L3, Neutral, Ground) or Delta (L1, L2, L3, Ground)
Utility Grid Frequency	60 Hz
Power Factor Range	+/- 0.5
THD for Linear Loads	<5%
Charging Efficiency	>95%
Grid Isolation	Galvanic, Integrated
DC OUTPUT	
Maximum Power	125 kW (625-800Vdc)
Voltage Operating Range	530Vdc to 920Vdc
Maximum Current	+/- 200Adc (charging cable limited)
Connector and Cable	CCS1, up to 8m (25 ft)
ENERGY METERING	
AC Energy Meter	+/- 1%
MECHANICAL	
PCS Dimensions	1000mm x 600mm x 2920mm (39.5"W x 24"D x 115"H)
PCS Weight	975kg (2150 lbs)
Dispenser Dimensions	559mm x 432mm x 1905 mm (22"W x 17"D x 75"H)
Dispenser Weight	68 kg (150 lbs) (configuration dependent)
ENVIRONMENTAL	
Cooling	Air + integrated liquid heat exchanger
Environmental Rating	NEMA 3R
Operating Ambient Temp.	-20°C to 45°C (-4 to 113°F)
Storage Temperature Range	-30°C to 60°C (-22 to 140°F)
Humidity	0 to 95% (non-condensing)
Altitude	De-rated over 2,000m (1.2 miles) above sea level
COMMUNICATION & CONTROL	
Network Interface	Ethernet, WiFi, 3G, 4G, LTE
EV Communication	DIN 70121, SAE J1772 , ISO 15118-2, ISO 15118-20 & custom implementations
Cloud Management	OCPP 1.6J compliant & Nuve proprietary protocol
CERTIFICATION, SAFETY, COMPLIANCE	
Certifications	UL1741-SA, UL 2202, UL 2231, IEEE 1547.1 & CSA C22.2 No. 107.1-16

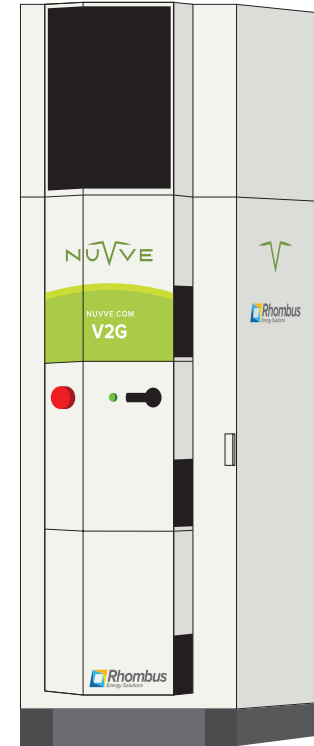

Charging Station



Dispenser

© 2022 Nuve Holding Corp. All rights reserved. Version 6.0. All product specifications as of January 2022 and are subject to change. Please contact Nuve for updated information. Charging station and dispenser not to scale.